



GENERAL NOTES:

- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
- CLEAR CONCRETE COVER IS 60 UNLESS NOTED OTHERWISE.
- ALL EXPOSED CORNERS SHALL HAVE A 20 CHAMFER.
- FOR CONCRETE SURFACE FINISHES AND SEALERS, SEE THE STANDARD SPECIFICATIONS FOR BRIDGE CONSTRUCTION SECTION 4 - CAST-IN-PLACE CONCRETE.

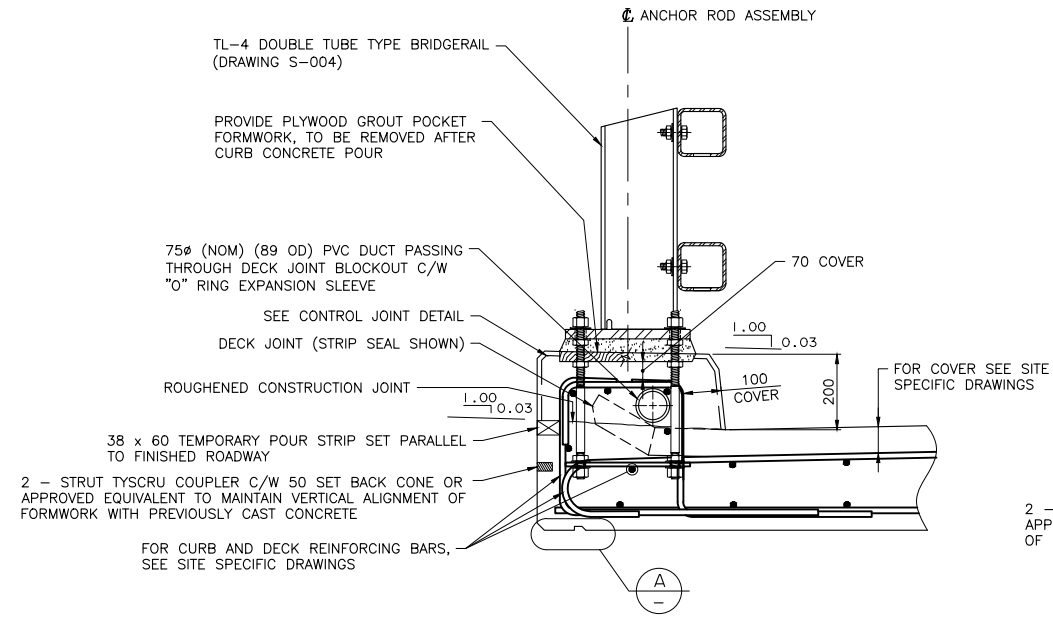


CONCRETE DECK SURFACE

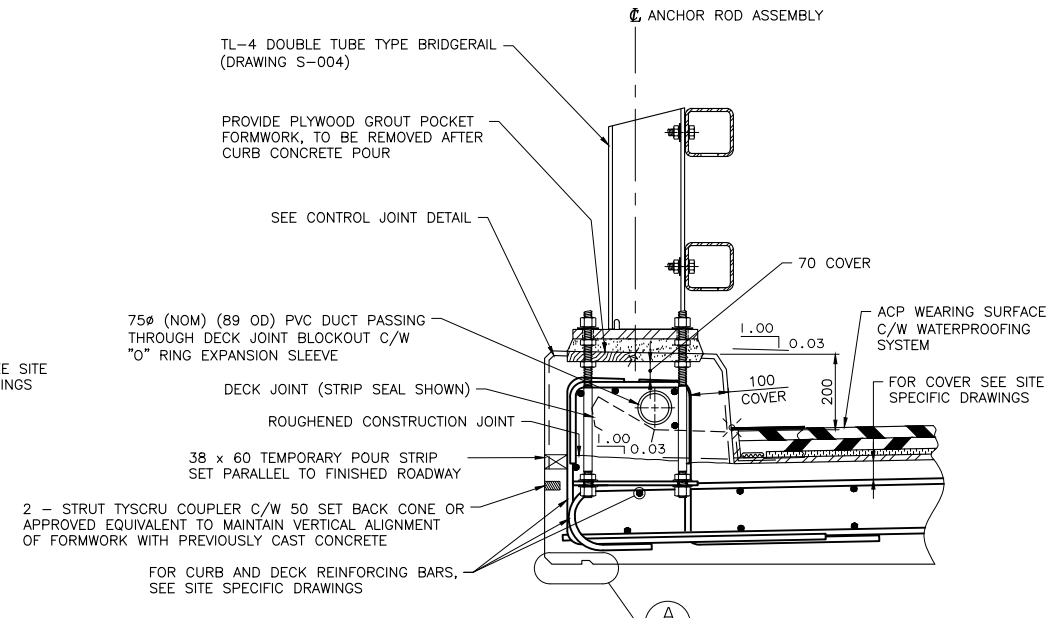

WITH ACP WEARING SURFACE

TYPICAL BARRIER ON DECK DETAIL

1:10

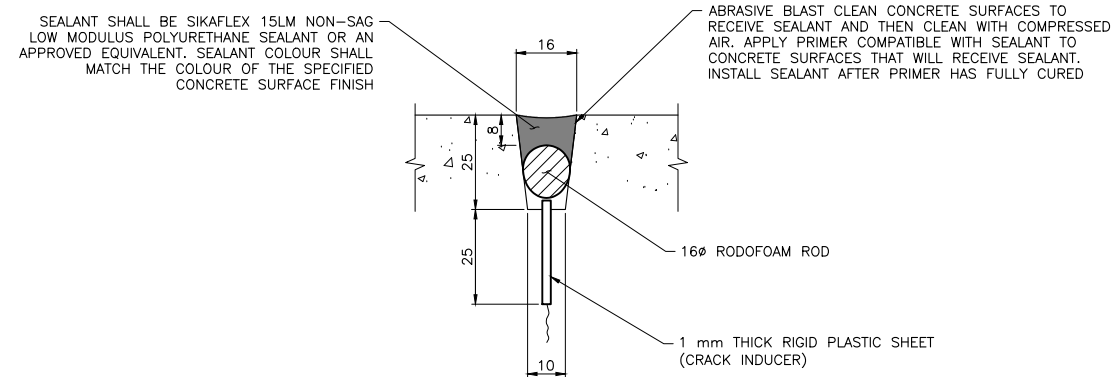


NOTES:

- AFTER THE ENTIRE DECK HAS BEEN CAST, THE CONCRETE BARRIER OR CURB SHALL BE PLACED CONTINUOUSLY WITH FORMED CONTROL JOINTS AT THE SPACING SPECIFIED ON THE REFERENCED BARRIER STANDARD DRAWING. LONGITUDINAL REINFORCEMENT SHALL BE DISCONTINUOUS AT THE CONTROL JOINT AND HAVE 60 CLEAR CONCRETE COVER FROM THE CENTRELINE OF THE CONTROL JOINTS
- CONTROL JOINTS SHALL BE CENTRED BETWEEN BRIDGERAIL, HANDRAIL, AND/OR SAFETY RAIL POSTS
- CONTROL JOINT CRACK INDUCER SHALL BE REMOVED PRIOR TO SURFACE PREPARATION AND APPLICATION OF SEALANT PRIMER
- CONTROL JOINT SEALANT SHALL BE APPLIED AND CURED PRIOR TO PLACING WATERPROOFING AND ACP

CONTROL JOINT DETAIL

1:1

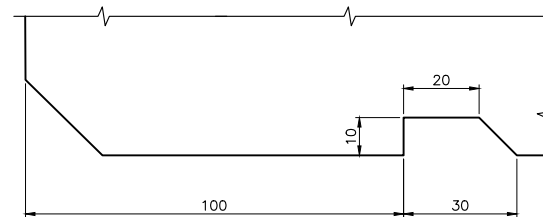

DRIP DETAIL

1:1

		Consultant Logo	
Rev	Date	Description	Init
REVISIONS			
Government of Northwest Territories STANDARD DRAWING BARRIER AND CURB DETAILS			
DESIGNED	K. HABEL	DATE	OCTOBER 25, 2024
CHECKED	K. WILLIS	DATE	OCTOBER 25, 2024
DRAWN	T. CHIU	DATE	OCTOBER 25, 2024
SCALE	AS SHOWN		
PROJECT No.		PREPARED UNDER THE DIRECTION OF	
		K. HABEL ENGINEER OF RECORD	
		DATE OCTOBER 25, 2024	
		DRAWING No.	
		S-006	